

Aquaray* 3X UV Systems

Ultraviolet Disinfection

WATER TECHNOLOGIES

Applications

- Wastewater disinfection
- Wastewater reuse
- CSO (Combined Sewer Overflow)

Main Characteristics

- Low-pressure high-output amalgam lamps
- Rated for outdoor/indoor use
- Vertical cross flow design
- Future upgrade flexibility

The Aquaray 3X vertical lamp system offers a proven disinfection performance in a reduced footprint for even the most stringent of effluent criteria, such as reuse applications.

Product Highlights

- High output vertical lamp
- Easy maintenance
- Small footprint
- Energy conservation
- No submerged connections
- 3rd party bioassay validation (NWRI)
- Title 22 certified

Main Features

- **Energy Conservation:** With a combination of variable-output electronic ballasts, highly efficient amalgam lamps and row-by-row lamp switching increments, the Aquaray 3X ensures energy conservation by dose pacing based on flow rate.
- **Validated Performance:** The Aquaray 3X has been third party validated and completed strict bioassay testing for disinfection and water reuse (Title 22 certified)
- **Easy Maintenance:** Due to the vertical design, the Aquaray 3X includes easy access to the UV lamps and quartz sleeves (no need to remove the UV module from channel).
- **Save Space:** To minimize the footprint, the Aquaray 3X utilizes low-pressure high-output amalgam lamps in a vertical design.

UV Technology: Aquaray 3X

The Aquaray 3X high-output vertical lamp ultraviolet disinfection system has been designed to provide disinfection for larger wastewater plants within a small footprint.

The germicidal effect of the UV light inactivates most microorganisms such as bacteria, viruses and parasites, while eliminating the need for dangerous chemicals.

The UV dose (UV intensity x contact time) defines the treatment efficiency which is provided by the unit. The effective dose applied depends on the UV transmittance of water to be treated as well as the proper hydraulic design of the UV system.

How it Works

The low pressure high output amalgam lamps are powered by electronic ballasts to generate germicidal wavelengths of the UV spectrum. The lamps are inserted in quartz sleeves and isolated from the wastewater while delivering the required effluent inactivation.

UV sensors are installed to monitor the UV intensity from the lamps and guarantee that the proper intensity is delivered.

The periodic maintenance of the system has been made simple and efficient by allowing the replacement of the lamps without removal of the submerged UV modules from the channel.



UV Technology: Aquaray 3X

Technical Data	Aquaray 3X
Flow rate per module m ³ /h	2.87
(Based on 30 mJ/cm ² and 65% UVT)	800
Number of Lamps per module	36
Lamp technology	low-pressure, high-output amalgam
Ballast type	electronic variable output
Lamp configuration	vertical cross flow
Average lamp life	10 000 - 12 000 hours
Power supply	230V/3ph + N/50-60Hz
Module Protection Class	IP 54
Control Panel Protection Class	IP 55

Model	Reactor Dimensions (mm)			
	A	B	C	D
Aquaray 3X	915	535	1880	735

Materials


- 316 stainless steel
- UV resistant materials

Options


- In-Channel Air Scrub
- UVT Analyzer
- Chemical cleaning system
- Lifting Apparatus

Remote Control and Alarms

- SCADA communication capability
- Dose pacing via external flow signal and UV transmittance
- Various alarms (low UV intensity, failed adjacent lamps, etc...)

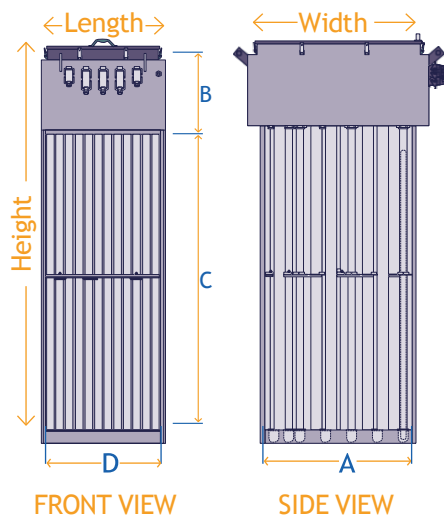

TYPICAL INSTALLATION

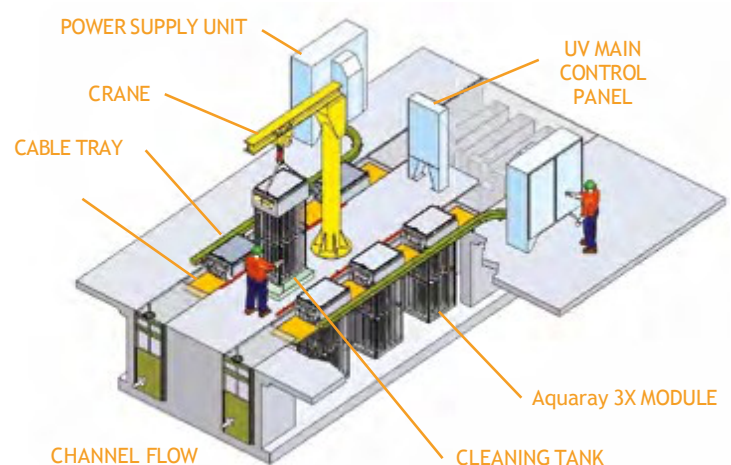

Resourcing the world

Curio Group Ltd
30 Celtic Court, Ball Moor
Buckingham MK181RQ
WWW.CURIOWATER.CO.UK



Veolia Water Technologies
Please contact us via:
WWW.VEOLIAWATERTECHNOLOGIES.COM